

The gun of choice for touch-up, shading, edging and detail decorating, EGA/EGHV touch-up guns provide precise control for any type of delicate spray finishing applications. The guns feature a forefinger trigger to enhance operator control, and a long needle taper to make detail work easy.

• Equipped with stainless steel tip and needle

EGA Touch-Up Conventional

Spray Gun

- Knurled knobs allow fine spray adjustments for fluid and pattern control
- Fluid delivery by attached suction feed or remote pressure feed cup
- Ideal for hours of fatigue-free precision painting

Ordering Information

The EGA/EGHV touch-up gun is available with the following air cap and fluid tip set-up, factory-assembled for immediate delivery.

Part No.

EGA-503-390F EGHV-531-397E

EGA/EGHV Touch-Up Spray Gun EGA/EGHV Accessories

- 8 oz. Cup (TGS-503) Solvent-resistant polyethylene cup available
- Remote Cups Two-quart remote cups are available in aluminum (KB-555) or stainless steel (KB-545-SS)
- Additional Accessories Hose assemblies, air cap test kit, gun and hose cleaning equipment and other accessories also are available

Technical Specifications – EGA

Body: Drop forged aluminum

Weight: 7 oz. (196 gr) with air cap and ring

Air and Fluid Inlet 1/4" NPS(M) Wetted Parts: Aluminum Body

400-grade stainless steel Tip and Needle

Air Consumption: 3 CFM @ 30 psi

Service Bulletin: SB-2-163

Technical Specifications – EGHV

Drop forged aluminum Body: Weight: 7.5 oz (210 gr) Air and Fluid Inlet 1/4" NPS(M) Wetted Parts: Stainless Steel


Air Consumption: 8.8 CFM @ 10 psi cap pressure

Air Cap Pressure: 10 psi @ 50 psi inlet

Service Bulletin: SB-2-167

Refer to Service Bulletin: EGA - SB-2-163, EGHV - SB-2-167

EGA/EGHV Touch-Up Spray Gun

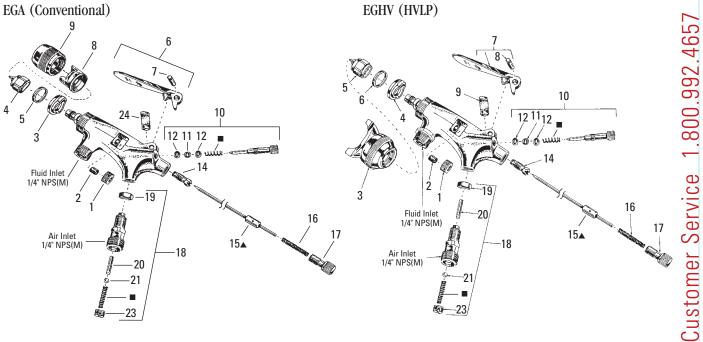

EGA (Conventional)

Ref. No.	Model No.	Description	Ind. Parts Required		
1	EGA-4	Packing Nut	1		
2	38273-136-K5	Fluid Needle Packing (Kit of 5)	1		
3	EGA-7	Baffle	1		
4	EGA-4000-F	Tip, Needle and Gasket (lapped) (includes 4, 5, 15)	1		
5	EGA-59-K5	Gasket (Kit of 5)	1		
6	EGA-443	Trigger and Stud Assy.	1		
■ 7	AG-3-1-K5	Trigger Bearing Stud (Kit of 5)	1		
8	EGA-40-390	Air Cap	1		
9	EGA-11	Retaining Ring	1		
10	EGA-454	Fan Adjusting Assembly			
■ 11	SSG-8205-K10	O-Ring (Kit of 10)			
1 2	AG-26-K10	Washer (Kit of 10)			
14	EGA-3	Packing Gland			
1 6	AG-7-K5	Needle Spring Kit (Kit of 5)	1		
17	AG-16	Fluid Needle Adjusting Screw	1		
18	EGA-441	Air Valve Assy.	1		
19	AG-46-K3	Lock Nut (Kit of 3) 1			
2 0	EGA-9-K5	Stem (Kit of 5)			
2 1	SST-3008-K5	Ball (Kit of 5)			
23	GD-36-K5	Spring Retainer (Kit of 5)			
2 4	EGA-5-K6	Air Valve Plunger (Kit of 6)			

■ A quantity of necessary parts is included in Gun Repair Kit KK-5044. Suffixes -K3, -K5, etc. designates kits of multiple parts. Example 38273-136-K5 is a kit of (5) packings.

EGHV (HVLP)

Ref. No.	Model No.	Description	Ind. Parts Required	
1	EGA-4	Packing Nut	1	
2	38273-136-K5	Needle Packing (Kit of 5)	1	
3	EGHV-439-397HV	Air Cap with Ring	1	
4	EGA-7	Baffle (air distributor)	1	
5	EGA-4000-E	Tip, Needle and Gasket Assy. (lapped) (includes 5, 6, 15)	1	
6	EGA-59-K5	Gasket (Kit of 5) (Polyethylene)	1	
7	EGA-443	Trigger and Stud Assy.	1	
■ 8	AG-3-1-K5	Trigger Bearing Stud (Kit of 5)	1	
■ 9	EGA-5-K6	Air Valve Plunger (Kit of 6)	1	
10	EGA-454	Fan Adjustment Assy Horn	1	
■ 11	SSG-8205-K10	O-Ring (Kit of 10)	1	
1 2	AG-26-K10	Washer (Kit of 10)	2	
14	EGA-3	Packing Gland	1	
1 6	AG-7-K5	Needle Spring (Kit of 5)	1	
17	AG-16	Needle Adj. Screw	1	
18	EGA-441	Air Valve Assy.	1	
19	AG-46-K3	Lock Nut (Kit of 3)	1	
2 0	EGA-9-K5	Stem (Kit of 5)	1	
2 1	SST-3008-K5	Ball (Kit of 5)	1	
23	GD-36-K5	Spring Retainer (Kit of 5)		
24	EGHV-3	Fluid Adapter	1	

A necessary quantity of parts is included in Gun Repair Kit KK-5044. Suffixes -K3, -K5, etc. designates kits of multiple parts. Example: EGA-59-K5 is a kit of (5) seals.

Air Cap Selection Guide

	Typical	Air Cap	Air Cap		nsumption 70°F	Typical Pattern Size	Fluid Tip No. and Size	Туре
Model	Materials	Model No.	Part No.	PSI	SCFM	in. (mm)	in. (mm)	of Feed ▶
EGA (Convention	Detail, Touch-Up, onal) Stains, Lacquer	390	EGA-40-390 ▲	30	3	Up to 3" (75)	F .042" (1.1)	P, S
EGHV	Detail, Touch-Up,	#397HV	EGHV-439-397HV	10	8.8	Up to 6" (150)	E .070" (1.8)	P, S

Type of Feed Reference:
P = Pressure
S = Suction

Air Cap Test Kit

KK-5043 Air Cap Test Kit — Includes air cap and gauge, for use with #397HV air caps only.

Fluid Tips & Needles

Model	# on Fluid Tip	Order Tip and Needle Set
EGA (Conventional)	F	EGA-4000-F
EGHV (HVLP)	E	EGA-4000-E



World Headquarters Industrial Finishing DeVilbiss 195 Internationale Blvd. Glendale Heights, IL 60139 630-237-5000 Fax 630-237-5011 www.devilbiss.com



[▲] Retaining Ring Required: Part No. EGA-11